












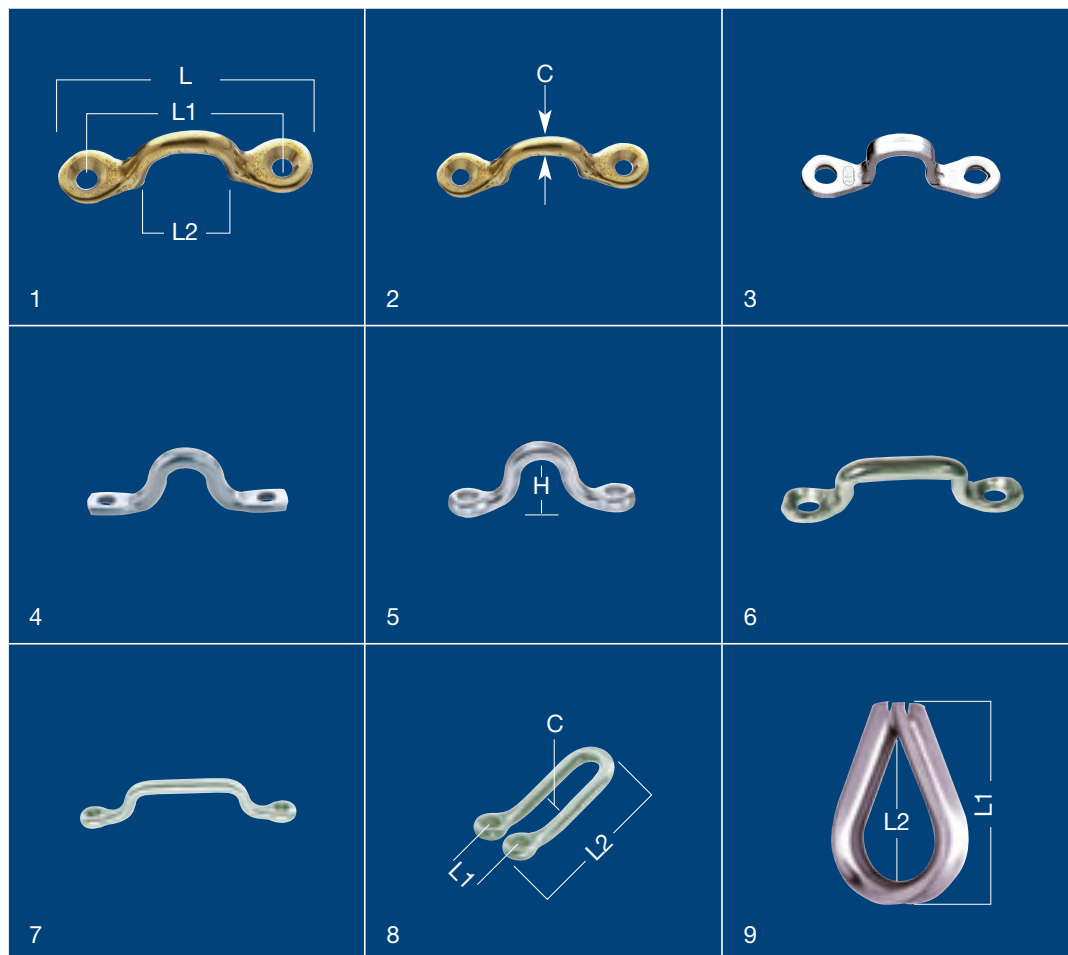


	bearing	 mm	 mm	 mm	boring Ø mm	art.-no.
1 sheave complete unit of high quality plastic		8 8		27x11 27x11	5 6	30960 005 00 30960 006 00
2 sheave Hostaform C		8 8 10 12 8 10 12 10 12 12 80x14 63x12		22x10,5 22x10,5 26x11,5 29x13,5 30x10,8 35x11,5 42x13,5 46x11,5 50x13,8 80x14 63x12	5,2 8,2 8,2 8,2 8,2 8,2 8,2 8,2 8,2 8,2 8,2 6,1	30970 001 63 002 63 026 63 029 63 030 63 035 63 042 63 046 63 050 63 080 63 30980 063 63
3 sheave brass nickel plated		4,5 6 8 8 8	4,5 6 8 8 8	13x6 17x8 20x9 25x10 30x10	4,3 4,3 4,6 5,3 6,2	30950 001 34 002 34 004 34 005 34 006 34
4 sheave hub, balls, and sheave stainless steel for swivelling mast block or usable as halyard block		8		27x10,5	5	30940 008 55
5 sheave stainless steel ball bearing cage of high quality plastic, sheaves stainless steel		5	3	25x6,6	6	30945 000 55
6 sheave stainless steel ball bearing cage of high quality plastic, sheaves stainless steel		6	4	38x8	7	30946 000 55






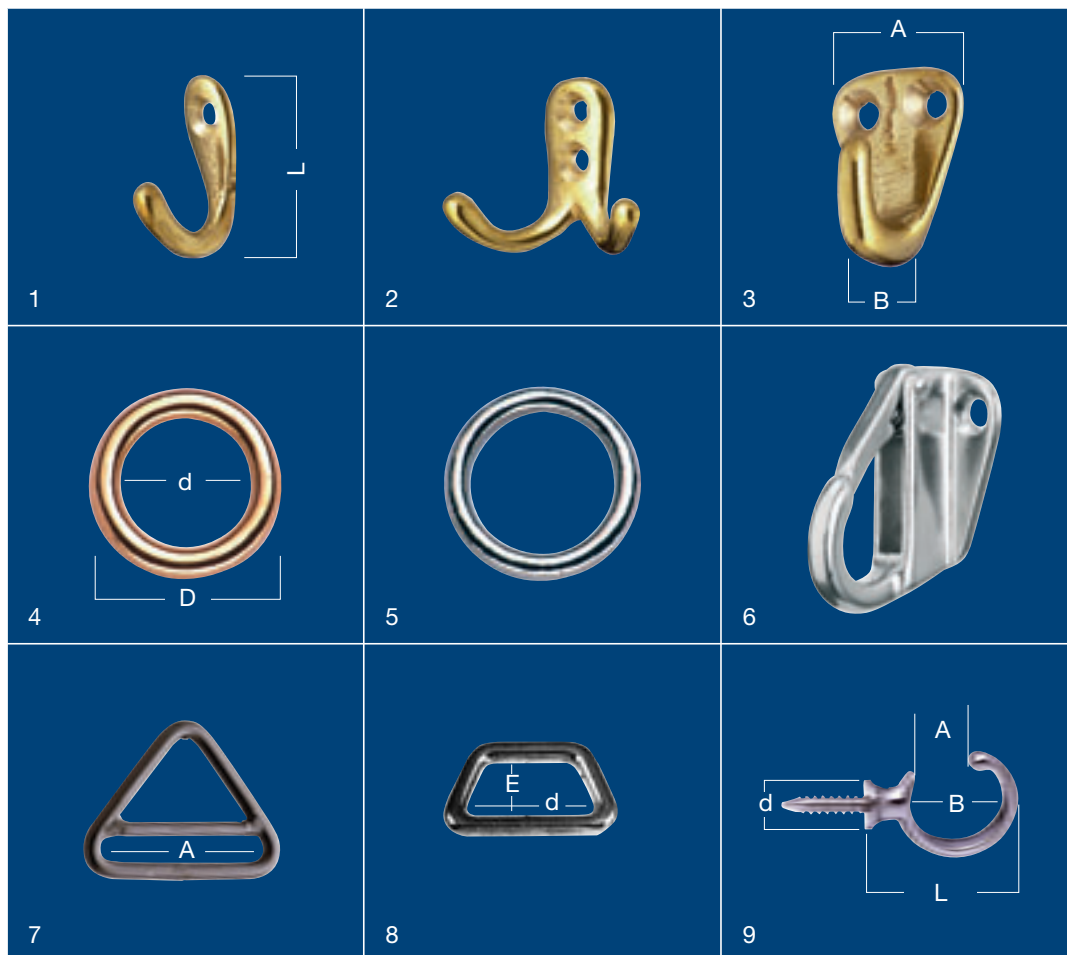

		L mm	A mm	B mm	d mm	D mm		E mm	art.-no.
1	hook brass polished	38							33160 000 33
2	hook brass polished with two holes and two hooks	34							33161 000 33
3	hook brass II. polished with two holes and one hook		21	10					35920 000 33
4	ring brass II. polished				19 25 29 32 45 45	27 35 39 45 63 59	4,0 4,8 4,8 6,6 9,0 7,0		30320 019 33 025 33 029 33 032 33 045 33 30321 045 33
5	ring stainless steel				25 32	36 44	5 6		30260 025 55 032 55
6	holder AISI 316, stainless steel brass II. chrome plated	40 45							39442 040 56 39441 000 35
7	spi ring stainless steel		60				6		38103 060 55
8	trapeze ring brass chrome plated				28/20	42	4,8	15	30326 000 33
9	cup-hook brass polished brass chrome plated	44	13	24	14				34041 000 30 000 32

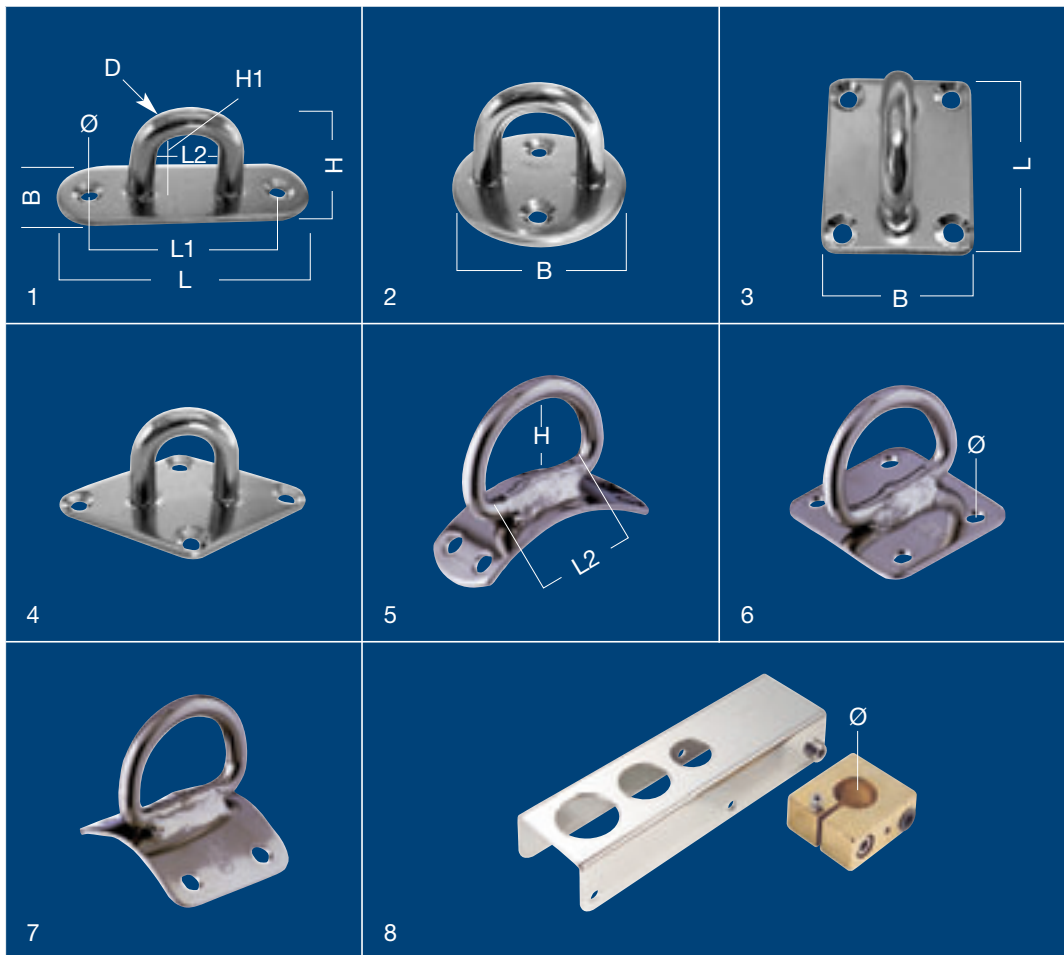

		C mm	H mm	L mm	L1 mm	L2 mm	for wire mm	bore hole mm Ø	Wichard no.	art.-no.
1	fender cleat brass polished brass chrome plated			53 53	40 40	13 13		4 4		37920 000 33 000 35
2	fender cleat brass polished brass chrome plated			55 55	40 40	10 10		4,1 4,1		37930 010 33 010 35
3	fender cleat stainless steel suitable counter plate for size 10: 37922 010 55 (w/o image)			39 46 55	30 35 42	9 10 16		4 5 5		37921 009 55 010 55 016 55
4	fender cleat stainless steel	4 5 6 8	11 13 16 17		32 40 44 47	10 11 14 14		3,2 4,2 5,2 5,2		37929 008 55 010 55 012 55 016 55
5	Wichard fender cleat stainless steel	4 5 6 8	11 13 16 21		30 37 44 59	8 10 12 16		4 5 6 8	9201 9202 9203 9204	37925 008 55 010 55 012 55 016 55
6	fender cleat AISI 304 stainless steel	6 6 6	13,0 15,5 15,5	62,5 67 82	48,5 53,5 67,5	25,5 31,0 41,0		5,8 5,8 5,8		33012 025 56 031 56 041 56
7	Wichard webbing eye strap for belts stainless steel		5 10		56 65	28 34		4 5	9211 9212	33010 028 55 034 55
8	Wichard reefing eye strap stainless steel	10			15	35		6	9415	33015 000 55
9	thimble medium strong AISI 316 stainless steel	4 5 6 7 8 9 11 14			24 32 35 41 44 50 58 75	14 16 21 26 29 35 42 48	3 4 5 6 7 8 10 12			36530 003 56 004 56 005 56 006 56 007 56 008 56 010 56 012 56



		B mm	L mm	LI mm	L2 mm	H mm	HI mm	D mm	ø mm	art.-no.
1	eyeplate oval	15	45	35	14	20	12	5	4,2	34255 001 56 002 56 003 56 004 56
	AISI 304	20	65	46	18	25	17	6	5,2	
	stainless steel	26	80	60	20	32	21	8	5,2	
		32	100	73	22	38	26	9	6,5	
2	eyeplate round	33		20	12	20	12	5	4,2	34256 001 56 002 56 003 56
	AISI 304	40		23	17	26	17	6	5,2	
	stainless steel	50		30	20	32	21	8	5,2	
3	eyeplate squarish	30	35		14	19	12	5	4,2	34257 001 56 002 56 003 56
	AISI 304	35	40		18	26	17	6	5,2	
	stainless steel	40	50		20	33	22	8	5,2	
4	eyeplate rhombic	37	59		11	22	12	5	4,2	34258 001 56 002 56 003 56
	AISI 304	40	64		15	26	15	6	4,2	
	stainless steel	50	80		18	33	20	8	5,2	
5	mast plate	24	63		30		20			38113 000 56
6	mast plate									
	AISI 304		40	50			22			38115 000 55
	stainless steel				32					
7	mast plate				32		22			38115 001 56 38115 002 55
	eye 90° turned (w/o image)				32		22			
	AISI 304									
	stainless steel									
8	rudder head fitting					35			25	38840 000 55
	stainless steel		55	200						